

## 1.4-3W, 12V Input, 180-2000V Output DC-DC Converters

<https://product.tdk.com/en/power/chvm>  
[www.emea.lambda.tdk.com/chvm](http://www.emea.lambda.tdk.com/chvm)



The CHVM series of non-isolated DC-DC converters feature very compact sizes and have a metal case to provide five-sided shielding for lower ripple and noise. Three package sizes cover power levels from 1.4W to 3W and output voltages of 180V to 2kV. The output can be adjusted from 0.5% to 100% of the rated voltage using either an external voltage or resistance.

Features	Benefits
• Programmable Output Voltage (Voltage or Resistance)	• Remote Adjustment
• Compact Size	• Less Board Area Needed
• Five-Sided Shielding	• Reduced Radiated and Conducted Noise
• Low Output Ripple	• Less External Filtering Required
• Safety Certified	• Simplified System Compliance

Model Selector							
Model	Input Voltage (V)	Output Voltage (V)	Maximum Current (mA)	Maximum Power (W)	Input Current (mA) (Typical)	Typical Ripple & Noise (mV)	Maximum Ripple & Noise (mV)
CHVM1R5-12-1000P	11.0 - 13.0	0 to +1000	1.5	1.5	220	5	15
CHVM1R5-12-1000N	11.0 - 13.0	0 to -1000	1.5	1.5	220	5	15
CHVM1R5-12-1500P	11.0 - 13.0	0 to +1500	1	1.5	230	7	25
CHVM1R5-12-1500N	11.0 - 13.0	0 to -1500	1	1.5	230	7	25
CHVM1R5-12-2000P	11.0 - 13.0	0 to +2000	0.7	1.4	280	10	30
CHVM1R5-12-2000N	11.0 - 13.0	0 to -2000	0.7	1.4	280	10	30
CHVM2R7-12-0180PW	10.8 - 13.2	0 to +180	15	2.7	350	30	100
CHVM2R7-12-0180NW	10.8 - 13.2	0 to -180	15	2.7	350	30	100
CHVM3-12-0300PW	10.8 - 13.2	0 to +300	10	3	395	30	100
CHVM3-12-0300NW	10.8 - 13.2	0 to -300	10	3	395	30	100
CHVM2R5-12-0350PW	10.8 - 13.2	0 to +350	7	2.45	330	30	100
CHVM2R5-12-0350NW	10.8 - 13.2	0 to -350	7	2.45	330	30	100
CHVM2R6-12-0470PW	10.8 - 13.2	0 to +470	5.6	2.63	390	40	150
CHVM2R6-12-0470NW	10.8 - 13.2	0 to -470	5.6	2.63	390	40	150
CHVM2-12-1000PW	10.8 - 16.5	0 to +1000	2	2	280	30	100
CHVM2-12-1000NW	10.8 - 16.5	0 to -1000	2	2	280	30	100
CHVM2-12-1500PW	10.8 - 16.5	0 to +1500	1.3	1.95	290	30	100
CHVM2-12-1500NW	10.8 - 16.5	0 to -1500	1.3	1.95	290	30	100
CHVM2-12-2000PW	10.8 - 16.5	0 to +2000	1	2	340	50	150
CHVM2-12-2000NW	10.8 - 16.5	0 to -2000	1	2	340	50	150


CHVM	1R5	-12	1000	P	W
	Output power 1R5: 1.4 to 1.5W 2: 2W 2R5: 2.45W 2R6: 2.63W 2R7: 2.7W	Nominal input voltage	Max. output voltage	P Positive polarity N Negative polarity	Blank: standard input W: wide range input

Specifications				
Model		CHVM1R5	CHVM2 / CHVM2R6	CHVM2R5, CHVM2R7 & CHVM3
<b>Input</b>				
Input Voltage Range	Vdc	See model selector table		
Safety Agency Certifications	-	IEC/UL/CSA/EN62368-1, CE Mark (LVD and RoHS)		
<b>Output</b>				
Output Voltage Tolerance	%	±2	±5	±5
Output Voltage Adjustment	-	External voltage or resistance		
Switching Frequency	kHz	200		
Line Regulation (Typical / Maximum)	%	0.01 / 0.02	0.03 / 0.1	0.02 / 0.06
Load Regulation (Typical / Maximum)	%	0.02 / 0.04	0.08 / 0.3	0.5 / 1.5
Ripple & Noise	-	See model selector		
Minimum Load	-	None		
Overcurrent Protection	-	Fold back mode >105%		
Overvoltage Protection	V	None		
Remote Sense	-	No remote sense		
Remote On/Off	-	ON: Open, OFF: Short (0 to 0.4V, 1mA max)		
Parallel Operation	-	Not possible		
Series Operation	-	Not possible		
<b>Environmental</b>				
Operating Temperature (-20°C start up)	°C	-10 to 50	-10 to 60, derate linearly above 50 to 60% load	-10 to 60, derate linearly above 50 to 60% load
Storage Temperature	°C	-25 to +85		
Humidity (non condensing)	%RH	20 - 95 (Operating & Storage)		
Cooling	-	Convection		
Altitude	m	2,000		
Vibration	-	See reliability data on website		
Shock	-	See reliability data on website		
<b>Other</b>				
Weight (Typ)	g	50	65	46
Size (WxLxH)	mm	44 x 16 x 30	110 x 12 x 19.75	80 x 12 x 19.75
Size (WxLxH)	Inches	1.73 x 0.63 x 1.18	4.33 x 0.47 x 0.78	3.15 x 0.47 x 0.78
Case Material	-	Metal		
MTBF	Hours	>600,000	>390,000	>480,000
Warranty	yrs	1		

Notes:

See website for detailed specifications, test methods and installation manual

## Outline Drawing CHVM1R5

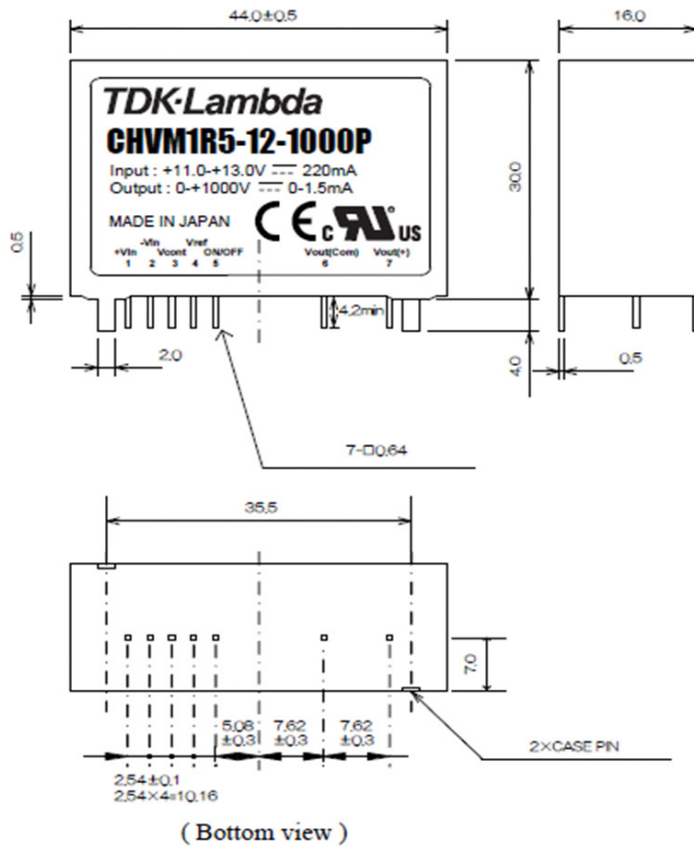


Pin-No.	Pin name
1	+Vin
2	-Vin
3	Vcont
4	Vref
5	ON/OFF
6	Vout(Com)
7	Vout (+ or -)

- 1) Terminal  
Material: Phosphor bronze  
Treatment: Ni base Au plating
- 2) Case  
Material: Brass  
Treatment: Nickel plating

Weight: 50g typ.  
Unit: mm  
Unspecified dimensional tolerance  $\pm 0.5$

## Outline Drawing CHVM2 and CHVM2R6

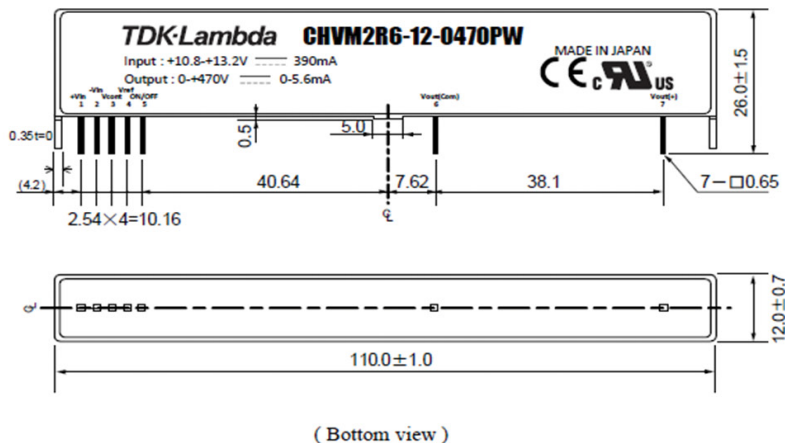


Pin-No.	Pin name
1	+Vin
2	-Vin
3	Vcont
4	Vref
5	ON/OFF
6	Vout (com)
7	Vout (+ or -)

- 1) Pins  
Material : Phosphorous bronze  
Treatment : Ni base Au coating
- 2) Case  
Material : Brass  
Treatment : Nickel coating

Weight : 65g typ. Units : mm Tolerance unless otherwise specified  $\pm 0.5$

## Outline Drawing CHVM2R5, CHVM2R7 and CHVM3

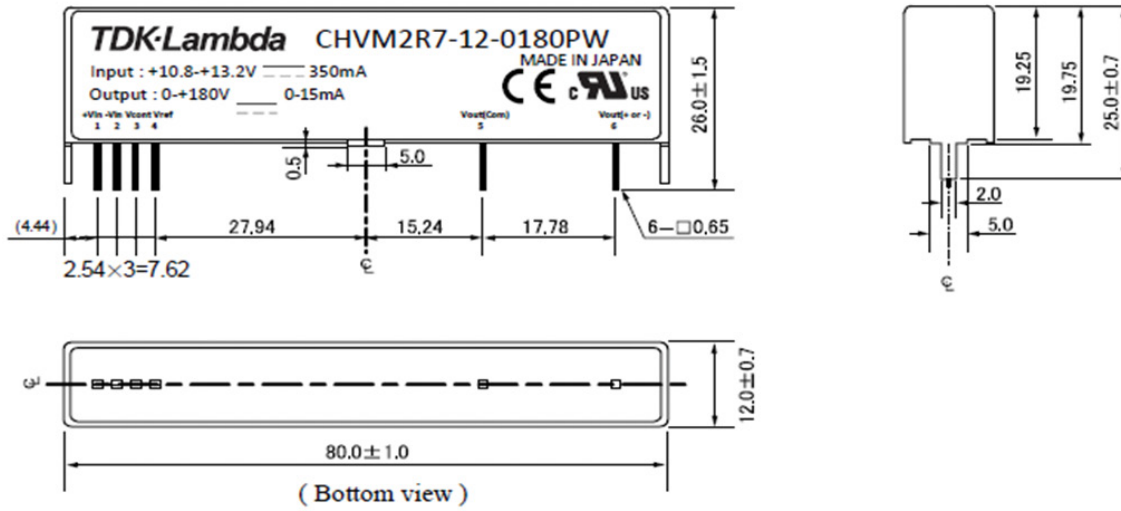

Pin-No.	Pin name
1	+Vin
2	-Vin
3	Vcont
4	Vref
5	Vout (com)
6	Vout (+ or -)

- 1) Pins  
 Material : Phosphorous bronze  
 Treatment : Ni base Au coating
- 2) Case  
 Material : Brass  
 Treatment : Nickel coating

Weight : 46g typ. Units : mm Tolerance unless otherwise specified ±0.5



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
france@fr.tdk-lambda.com  
www.emea.lambda.tdk.com/fr



## Italy Sales Office

Tel: +39 02 61 29 38 63  
info.italia@it.tdk-lambda.com  
www.emea.lambda.tdk.com/it



## Netherlands

info@nl.tdk-lambda.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
info.germany@de.tdk-lambda.com  
www.emea.lambda.tdk.com/de



## Austria Sales Office

Tel: +43 2256 655 84  
info@at.tdk-lambda.com  
www.emea.lambda.tdk.com/at



## Switzerland Sales Office

Tel: +41 44 850 53 53  
info@ch.tdk-lambda.com  
www.emea.lambda.tdk.com/ch



## Nordic Sales Office

Tel: +45 8853 8086  
info@dk.tdk-lambda.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
powersolutions@uk.tdk-lambda.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
info@tdk-lambda.co.il  
www.emea.lambda.tdk.com/il



## C.I.S.

### Commercial Support:

Tel: +7 (495) 665 2627

### Technical Support:

Tel: +7 (812) 658 0463  
info@tdk-lambda.ru  
www.emea.lambda.tdk.com/ru



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
powersolutions@us.tdk-lambda.com  
www.us.lambda.tdk.com



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
powersolutions@cn.tdk-lambda.com  
www.lambda.tdk.com.cn



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tis.mkt@sg.tdk-lambda.com  
www.sg.lambda.tdk.com



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@in.tdk-lambda.com  
www.sg.lambda.tdk.com

Ihr Vertriebspartner:

**HY-LINE**  
hy-line.de  
LEADER IN TECHNOLOGY.

HY-LINE Power Components  
Vertriebs GmbH  
Inselkammerstr. 10  
D-82008 Unterhaching  
☎ +49 89/ 614 503 -10  
power@hy-line.de

HY-LINE AG  
Hochstrasse 355  
CH-8200 Schaffhausen  
☎ +41 52 647 42 00  
info@hy-line.ch

For Additional Information, please visit  
<https://product.tdk.com/en/power/>

