

- Standard Quarter Brick Footprint
- 36-75VDC & Wide Range 18-60V Inputs
- 5V 30A - 15V 10A Nominal Outputs
- Through Hole Mounting
- Low 10.41mm Profile
- 1500VDC Basic Isolation

## iQE Series

108 - 204W

Quarter Brick Converter

Ihr Vertriebspartner:

**HY-LINE**  
POWER COMPONENTS

Inselkammerstraße 10  
D-82008 Unterhaching  
Tel: +49 (0)89 614 503 10  
Fax: +49 (0)89 614 503 20  
E-Mail: power@hy-line.de  
URL: www.hy-line.de

### iQE Features and Benefits

#### Features

- High operating efficiency (>90%)
- Constant switching frequency
- Low component count

#### Benefits

- Reduced system heating
- Easier system filtering
- Higher reliability

Specifications		iQE Series			
ITEMS	MODEL	3.3*	5	12	15
Nominal Output Voltage	VDC	3.3*	5	12	15
Input Voltage Range	VDC	See model Selector			
Input Current (max)	A	10			
Output Voltage Tolerance	VDC	3.2 - 3.4	4.85 - 5.15	11.58 - 12.42	14.48 - 15.52
Ripple & Noise (max) (pk to pk) (1)	mV	150	150	150	150
Line Regulation (max)	mV	10	15	30	30
Load Regulation (max)	mV	10	30	30	30
Overload Protection (typ)	%	Inception - 133-158% of rated output; Short circuit - auto recovery			
Overvoltage Protection	VDC	3.8 - 4.6	5.7 - 6.7	13.6 - 16.5	16.7 - 21
Remote Sense	-	Yes			
Remote On / Off	-	Positive or Negative Logic available, see Model Selector			
Temperature (operating)	°C	-40°C to +125°C			
Temperature (storage)	°C	-55°C to +125°C			
Humidity (operating)	-	20 - 95% RH Non condensing			
Humidity (storage)	-	10 - 95% RH Non condensing			
Cooling	-	Convection or forced air			
Isolation Voltage	VDC	1500			
Vibration (non operating)	-	5 to 50Hz @ 0.5g (4.9m/s <sup>2</sup> ), and 50 to 500Hz @ 1.5g (14.7m/s <sup>2</sup> ) per Bellcore TR-EOP-000063-5.4.4			
Shock	-	196.1m/s <sup>2</sup>			
Safety Agency Approvals	-	UL60950 (US and Canada), VDE0805 (IEC60950), CB scheme (IEC60950)			
Weight (max)	g	50			
Size	mm	57.9 x 36.8 x 10.41			
Warranty	yrs	3			

**Notes:** (1) Measured across one 22µF and one 0.1µF ceramic capacitor; BW = 20MHz \* Last time buy Sept 2017


Model Selector						
Model	Input Voltage (V)	Output Voltage (V)	Adjust Range (V)	Max. Current (A)	Max. Output Power (W)	Efficiency
IQE24009A120V-001-R*	18-36	12	10.8-13.2	9	108	88
IQE24024A050V-001-R*	18-36	5	4.5-5.5	24	120	90
IQE24030A033V-001-R*	18-36	3.3	2.97-3.63	30	99	90
IQE48010A150V-007-R	36-75	15	13.5-16.5	10	150	91
IQE48017A120V-001-R	36-75	12	10.8-13.2	17	204	93
IQE48030A050V-001-R	36-75	5	4.5-5.5	30	150	91
IQE4W011A120V-001-R	18-60	12	10.8-13.2	11	132	90

**Preferred** NB: other configurations on request \* Last time buy Sept 2017

Feature Set					
Feature Set	Positive Logic On / Off	Negative Logic On / Off	0.110" Pin Len.	0.180" Pin Len.	0.145" Pin Len.
01		X			X
07		X		X	

PIN Out	
PIN	Function
1	Vin (+)
2	On / Off
3	Vin (-)
4	Vout (-)
5	Sense (-)
6	Trim
7	Sense (+)
8	Vout (+)

**Recommended Hole Pattern (Top View)**

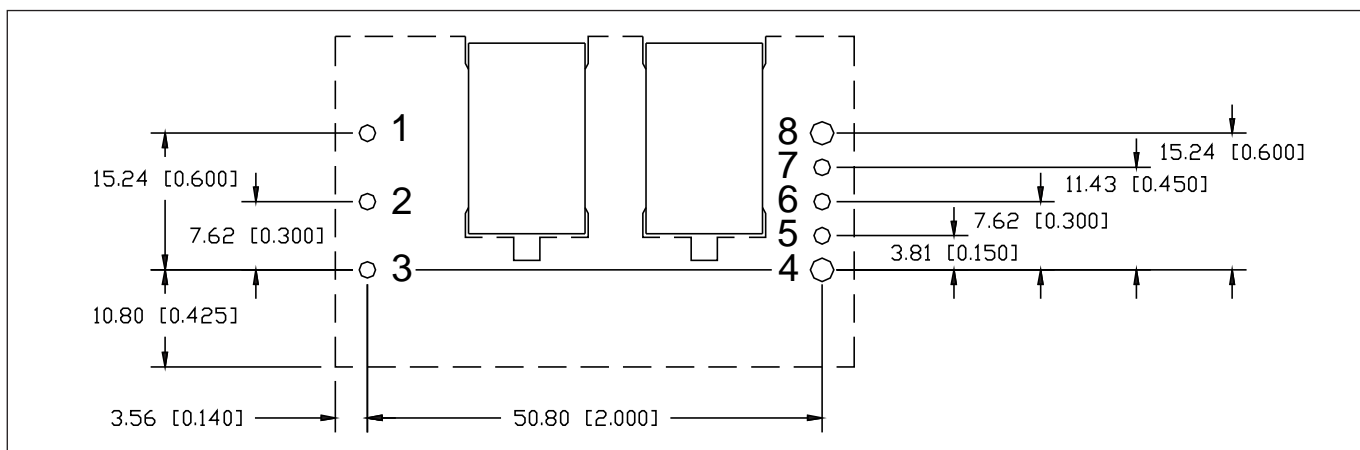



**TDK-Lambda France SAS**

3 Avenue du Canada  
 Parc Technopolis  
 Bâtiment Sigma  
 91940 les Ulis  
 France  
 Tel: +33 1 60 12 71 65  
 Fax: +33 1 60 12 71 66  
[france@fr.tdk-lambda.com](mailto:france@fr.tdk-lambda.com)  
[www.fr.tdk-lambda.com](http://www.fr.tdk-lambda.com)



**Italy Sales Office**

Via dei Lavoratori 128/130  
 20092 Cinisello Balsamo (MI)  
 Italy  
 Tel: +39 02 61 29 38 63  
 Fax: +39 02 61 29 09 00  
[info.italia@it.tdk-lambda.com](mailto:info.italia@it.tdk-lambda.com)  
[www.it.tdk-lambda.com](http://www.it.tdk-lambda.com)



**Netherlands**

[info@nl.tdk-lambda.com](mailto:info@nl.tdk-lambda.com)  
[www.nl.tdk-lambda.com](http://www.nl.tdk-lambda.com)



**TDK-Lambda Germany GmbH**

Karl-Bold-Strasse 40  
 77855 Achem  
 Germany  
 Tel: +49 7841 666 0  
 Fax: +49 7841 5000  
[info.germany@de.tdk-lambda.com](mailto:info.germany@de.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



**Austria Sales Office**

Aredstrasse 22  
 2544 Leobersdorf  
 Austria  
 Tel: +43 2256 655 84  
 Fax: +43 2256 645 12  
[info@at.tdk-lambda.com](mailto:info@at.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



**Switzerland Sales Office**

Bahnhofstrasse 50  
 8305 Dietlikon  
 Switzerland  
 Tel: +41 44 850 53 53  
 Fax: +41 44 850 53 50  
[info@ch.tdk-lambda.com](mailto:info@ch.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



**Nordic Sales Office**

Haderslevvej 36B  
 DK-6000 Kolding  
 Denmark  
 Tel: +45 2911 9556  
[info@dk.tdk-lambda.com](mailto:info@dk.tdk-lambda.com)



**TDK-Lambda UK Ltd.**

Kingsley Avenue  
 Ilfracombe  
 Devon EX34 8ES  
 United Kingdom  
 Tel: +44 (0) 12 71 85 66 66  
 Fax: +44 (0) 12 71 86 48 94  
[powersolutions@uk.tdk-lambda.com](mailto:powersolutions@uk.tdk-lambda.com)  
[www.uk.tdk-lambda.com](http://www.uk.tdk-lambda.com)



**TDK-Lambda Ltd.**

Kibbutz  
 Givat Hashlosha 48800  
 Israel  
 Tel: +9 723 902 4333  
 Fax: +9 723 902 4777  
[info@tdk-lambda.co.il](mailto:info@tdk-lambda.co.il)  
[www.tdk-lambda.co.il](http://www.tdk-lambda.co.il)



**C.I.S.**

**Commercial Support:**

Tel: +7 (495) 665 2627

**Technical Support:**

Tel: +7 (812) 658 0463

[info@tdk-lambda.ru](mailto:info@tdk-lambda.ru)

[www.tdk-lambda.ru](http://www.tdk-lambda.ru)

**Local Distribution**

Ihr Vertriebspartner:

Inselkammerstraße 10  
 D-82008 Unterhaching  
 Tel: +49 (0)89 614 503 10  
 Fax +49 (0)89 614 503 20  
 E-Mail: [power@hy-line.de](mailto:power@hy-line.de)  
 URL: [www.hy-line.de](http://www.hy-line.de)