



Inductance Characteristics

OCL vs. Isat

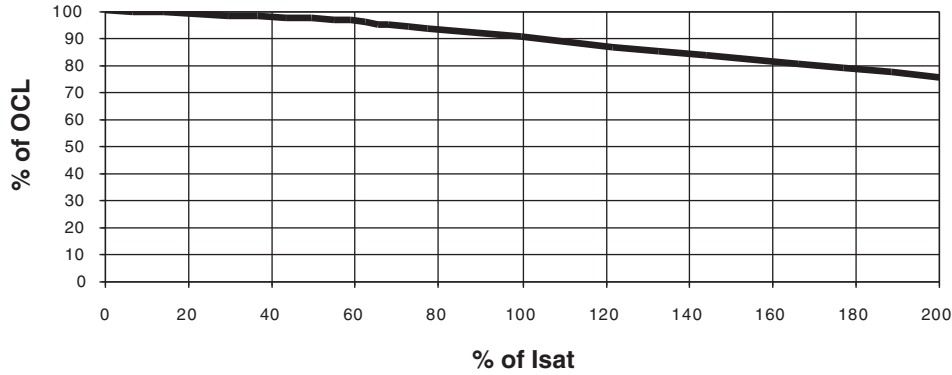


Core Loss

FP3 AC Loss at Frequency, kHz
CoreLoss vs. Flux Density

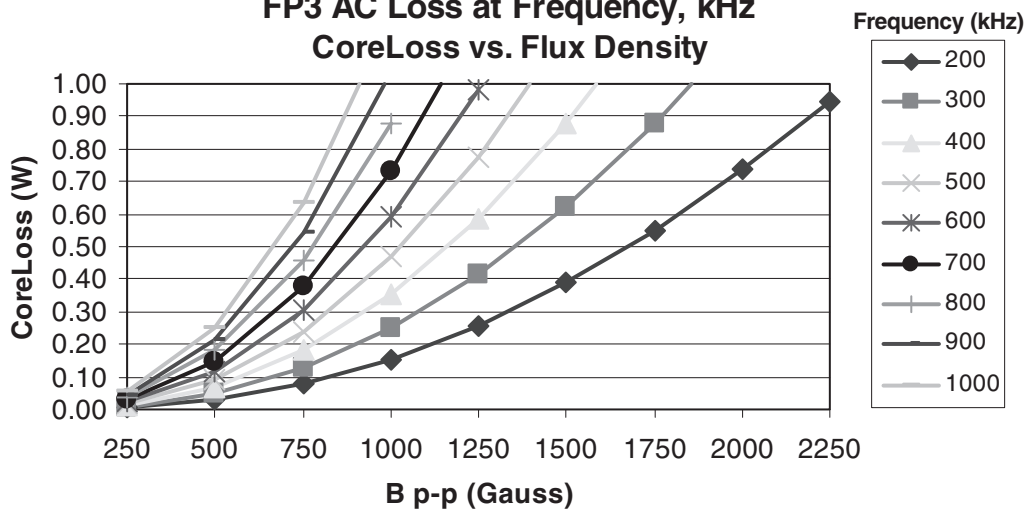

Temperature Rise vs. Watt Loss

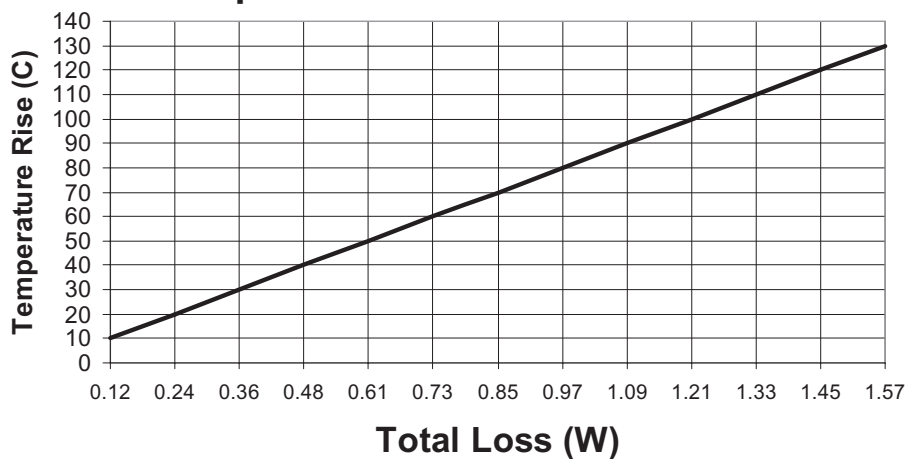

Ihr Vertriebspartner:
HY-LINE[®]
POWER COMPONENTS

Inselkammerstraße 10 D-82008 Unterhaching Tel.: +49 (0)89 614503 10 Fax: +49 (0)89 614503 20 E-Mail: power@hy-line.de URL: www.hy-line.de	Gründenstrasse 10 CH-8247 Flurlingen Tel.: +41 (0)52 647 42 00 Fax: +41 (0)52 647 42 01 E-Mail: power@hy-line.ch URL: www.hy-line.ch
--	---

Visit us on the Web at www.cooperbussmann.com**1225 Broken Sound Pkwy. Suite F Boca Raton, FL 33487**
Tel: +1-561-998-4100 Toll Free: +1-888-414-2645 Fax: +1-561-241-6640

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.